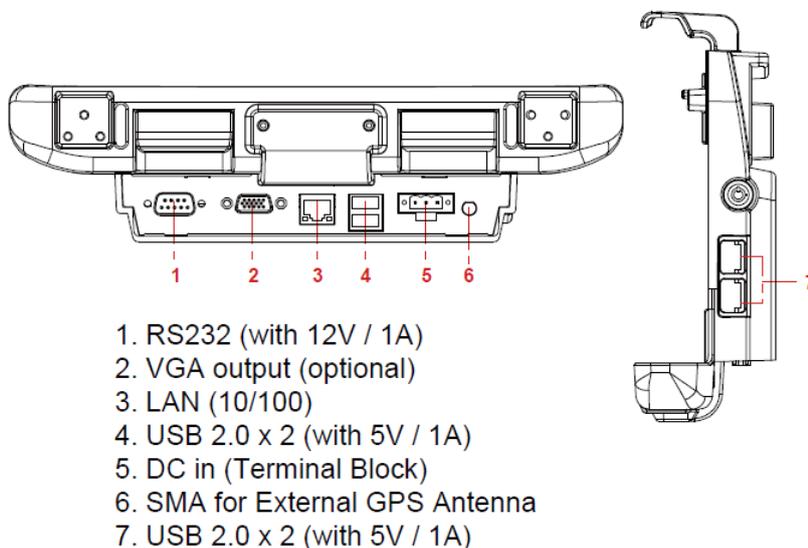

Vehicle Docking Quick Start Guide

Content

- Vehicle Docking x 1
- Docking Driver CD x 1
- Terminal Block Plug x 1
- Quick Start Guide x 1
- Screws for VESA mount x 4
- Power Cable (Cigarette Receptacle to Terminal Block) x 1

Specification



First Time Operation

Driver installation

For the tablet to work with the vehicle docking, the driver of the vehicle docking has to be installed first. The vehicle docking driver is not pre-installed on the tablet. For a detailed installation guide, please refer to the CD that is included with the package. OR visit winmate official site's download center to download the latest driver: <http://www.winmate.com.tw/>

Mounting

The vehicle docking is designed to work with a standard 75mm x 75mm VESA vehicle mounting arm or base. Please mount the VESA plate on the back of the vehicle mount first before using it with the tablet.

How to Use

Insert Tablet



1. Align the docking alignment fingers on the bottom of the vehicle mount to bottom of the tablet, and then push down the tablet in against the vehicle mount.
2. Make sure the tablet's back is aligned upright against the vehicle mount. Reposition if the tablet still moves around.
3. Push down the hook until a click sound is heard to secure the tablet into the vehicle mount.

Remove Tablet



1. Reach for the latch on the back of the tablet and pull it sideways.
2. The top hook should be released after the latch is pulled.
3. Tilt the tablet slightly forward first, and then pull the tablet straight up to remove it.

Powering the Vehicle Docking

The vehicle docking's input/output expansion functions will only work if power is connected.

1. Use the optional power cable (car cigarette lighter to terminal block)
2. Provide 9~36V input power to the terminal block directly.

External Display Modes (If optional VGA port is equipped)

Display Modes	Description
Mirror Mode (Default)	Under mirror mode, users can easily operate with touch screen.
Extend Mode	It is recommended to operate the tablet with keyboard / mouse under this mode. If touch function is desired, please use the mirror mode.

Note: Display settings are saved automatically for use next time.